


8610138

NOTES:

1. ASSEMBLY MUST MEET OR EXCEED SAE J684, CLASS IV, 7600 LBS MIN BREAKING LOAD.
2. ASS'Y TO HOLD 7600 LBS LOAD FOR 1 MINUTE WITHOUT LOSS OF LOAD.
3. CHAIN MUST NOT PASS THRU .250 MAX GAP OPENING IN CLOSED END OF HOOK.

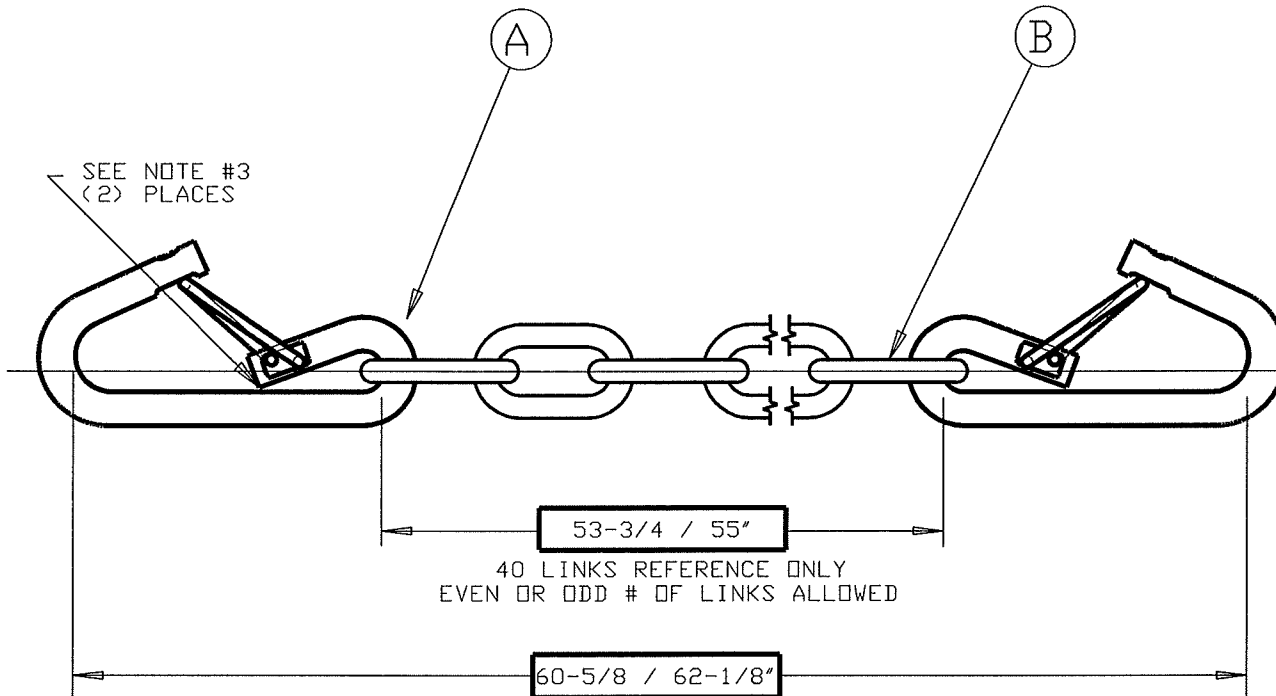

40 LINKS REFERENCE ONLY
EVEN OR ODD # OF LINKS ALLOWED

A	15 APR 2008	JF	MAXIMUM GAP WAS .100
REV.	DATE	CHG. BY	DESCRIPTION
REVISIONS			
DESCRIPTION			
8/O STR MACH x 60" w/937 S-HOOKS w/LATCHES			
MATERIAL			
SEE BILL OF MATERIAL			
HEAT TREAT			
DIM ARE IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.		DRAWN BY	J. FINN
BREAK ALL SHARP EDGES DECIMALS		CHK'D BY	-
± .0 ± .12 ± .00 ± .06 ± .000 ± .03		APP'D BY	-
ANGLES ± .06		THIS DRAWING IS THE PROPERTY OF PEERLESS CHAIN CO. AND IS PROPRIETARY IN GENERAL AND IN DETAIL IT SHALL NOT BE COPIED OR ITS CONTENTS REVEALED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF PEERLESS CHAIN CO.	
BILL OF MATERIAL		PEERLESS CHAIN CO. WINONA MINNESOTA	
B	1	8/O STR MACHINE CHAIN ZN	6018031
A	2	CLASS IV SAFETY HOOK w/ LATCH	7993731
ITEM	QTY/PC	DESCRIPTION	MATERIAL
			LENGTH
			53.9"
			62.125"
SCALE		SIZE	
NTS		B	
SHT. 1		OF 1	
DWG. NO.			8610138