

Date: _____ Account # _____
 Account Name: _____
 Contact Person: _____
 Phone: () _____
 Customer Signature: _____



LEAF SPRING

SUSPENSION AXLES

MEDIUM DUTY
 9,000 - 15,000 LBS.
 CAPACITY

Axle Model: D90 D100G D100 D120 D150

Capacity: _____ **Quantity:** _____

Hub Face: _____ **Track Width:** _____ **Spring Center:** _____

Axle Type: Beam only Idler Brake Axle

Bearing Lubrication:
 Grease Oil

Brake Type:
 Electric Single-Servo Hydraulic
 Disc Hydraulic (10k & 12K) Duo-Servo Hydraulic (Standard Hyd. Drum)

Park (hydraulic only):
Air Brake (options):
Chambers:
 Type 20 (10K-12K) Type 30 (15K) Type 20/24 (10K-12K)
 Type 30/30 (15K) No Chambers
 Mounted for 20/24 & 30/30

Slacks:
 Manual Adjust Automatic Adjust No Slacks

Cam Length:
 Standard Length Length: _____

ABS (Air & Hydraulic)
Wheel Bolt Pattern: 8 on 6.50 (9K, 10K & 12K)
 8-275mm (15K)

Whee Nuts: 5/8" Flgd 5/8" Coned/Clamp Ring (standard)

Pre-wired: Yes No (standard)

Spring Seats: Under Axle Over Axle Loose NONE

Spring Type: Slipper HDSS Suspension No Springs

Spring Capacity: _____


Adjustable Suspension: Yes No

Painted: Yes No


Notes: _____

STRAIGHT AXLE


HUBFACE - TRACK WIDTH - SPRING CENTER

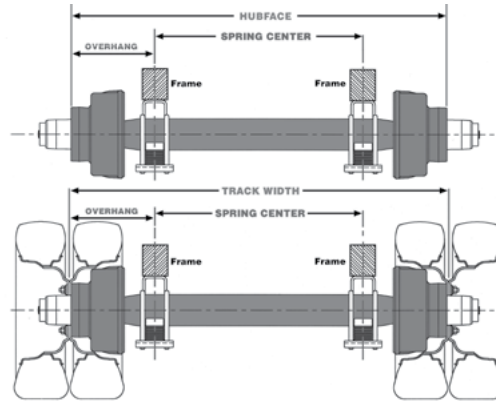

WHEEL OFFSET

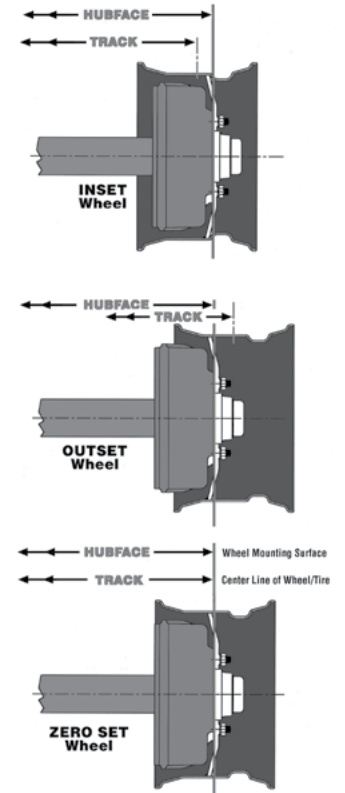


SPRING POSITION

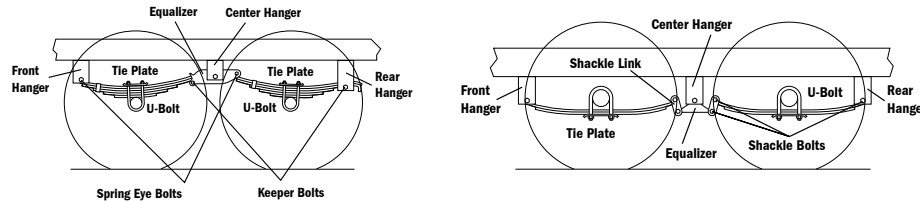

OVERSLUNG SHOWN


UNDERSLUNG SHOWN

SPRING TYPE

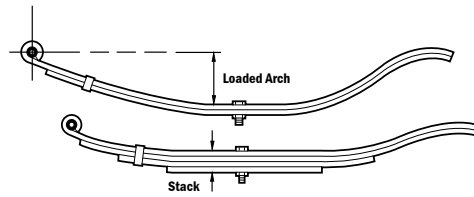

SLIPPER SPRING

AXLE SPACING

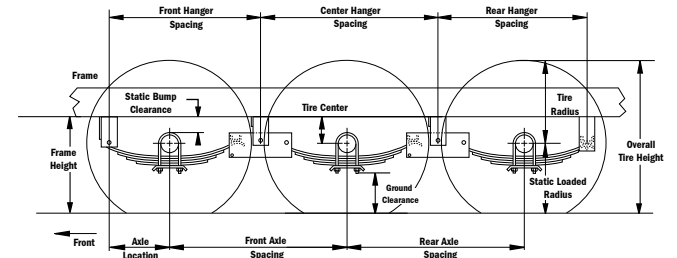

Southwest Wheel
 343 Gemblar Road
 San Antonio, TX 78219
 Ph/Fax/Text -- (210) 226-0301

